



# Rope & Twine



C A T A L O G



Call Toll Free 1-800-489-1416 • In Alabama Call Collect (334) 365-5416 • Fax (334) 365-5729

# COTTON

NOTE: Standard put up is center pull coils for 3/8" diameters and larger, and tubes for 3/16" diameter and smaller. Net weights are subject to a plus or minus 10% variation.

## Twisted Cotton Blend Rope, White

UPC Code	Diameter	Feet/Lb.	Feet/Coil	Net Wt.
10102	3/16"	90	2250	25
10103	7/32"	80	2000	25
10104	1/4"	55	1200	22
10105	5/16"	40	1200	30
10106	3/8"	24	600	25
10107	1/2"	16	600	38
10108	5/8"	11	600	55
10109	3/4"	7.5	600	80
10111	1"	5	600	120
10112	1-1/4"	3.5	600	171



- Excellent Utility Rope
- Low Cost
- Available in Coils or Pre-cut Hanks
- Available in White or Variegated

## 100% Natural Cotton Rope

UPC Code	Diameter	Feet/Lb.	Feet/Coil	Net Wt.
10152	3/16"	90	2250	25
10153	7/32"	80	2000	25
10154	1/4"	55	1200	22
10155	5/16"	40	1200	30
10156	3/8"	24	600	25
10157	1/2"	16	600	38
10158	5/8"	11	600	55
10175	3/4"	7.5	600	80
10176	1"	5	600	120
10177	1-1/4"	3.5	600	171



MADE IN U.S.A.

## Twisted Cotton Blend Rope, Variegated

UPC Code	Diameter	Feet/Lb.	Feet/Coil	Net Wt.
11003	5/16"	40	1200	30
11007	3/8"	24	600	25
11012	1/2"	16	600	38
11013	5/8"	11	600	55
11015	3/4"	7.5	600	80
11016	7/8"	16	600	100
11017	1"	5	600	120
11018	1 1/4"	3.5	600	171



VARIEGATED

### Pre-Cut Hanks

UPC Code	Diameter	Color	Length	Hanks/Carton
11004	5/16"	white	38 feet	12
11005	5/16"	variegated	38 feet	12

# PACKAGED ROPE

PACKAGED ROPE  
AVAILABLE IN PRE CUT  
LENGTHS OF  
25-50-100 FEET  
TWISTED OR  
BRAIDED COTTON -  
POLYPROPYLENE -  
AND NYLON  
IN SIZES 1/4 - 5/16 - 3/8 -  
1/2 INCH DIAMETER



MADE IN U.S.A.

**Multi-Purpose  
Quality Rope**  
for  
Homes • Farms  
Boating • Trucking  
Camping • Autos  
& More

## Twisted Nylon Rope 4-Stage

UPC Code	Diameter	Feet/Spool	Ft./Lb.	Net Wt. Spool
31002	1/4"	1200	64.5	18.6
31005	5/16"	600	50	12
31008	3/8"	600	27.5	21.8
31010	1/2"	600	15	39
31011	5/8"	600	9.5	63
31012	3/4"	600	6.9	87
31013	1"	600	3.8	158
31014	1-1/4"	600	2.5	240

- Continuous Filament Nylon Construction
- Other Put-Ups Available
- 3 Strand Twisted

MADE IN U.S.A.

Available in eight diameters, from 1/4" up to 1 1/4". Excellent for the big job where maximum strength is needed. Made from high quality continuous filament nylon.



## Solid Braid Nylon

UPC Code	No.	Size	Lbs./1,000'	Ft. Spool
00004	4	1/8"	4	500 +1,000 ft. spools
00005	5	5/32"	5.75	500 +1,000 ft. spools
00006	6	3/16"	8	475 +1,000 ft. spools
00008	8	1/4"	13.25	250 +1,000 ft. spools
00010	10	5/16"	22	175 +1,000 ft. spools
00012	12	3/8"	30.5	150 +1,000 ft. spools
00016	16	1/2"	50.75	75 +1,000 ft. spools

MADE IN U.S.A.



## Diamond Braid Nylon

UPC Code	No.	Size	Lbs./1,000'	Ft. Spool
00104	# 4	1/8"	4	500 +1,000 ft. spools
00108	# 8	1/4"	13.25	250 +1,000 ft. spools
00110	# 10	5/16"	22	175 +1,000 ft. spools
00112	# 12	3/8"	30.5	150 +1,000 ft. spools



MADE IN U.S.A.



**POLYESTER • MANILA • TWINE • SISAL • CUTTERS**



MADE IN U.S.A.

- 7/32" Used for Hammock Rope
- 3/8" Used in Commercial Fishing Industry for Mud Lines

**Spun Polyester**

UPC Code	Size	Ft./Lb.	Net Wt./Tube
00601	7/32"	95	21
00602	3/8"	30	25

**Manila**

Our top quality manila cordage is made from 1st grade material (imported).

UPC Code	Size	Ft./Lb.	Ft./Coil	Net Wt.
00701	1/4"	50	1250	27
00702	5/16"	32	1700	54
00703	3/8"	24	600	26
00704	1/2"	13	600	47
00705	5/8"	8	600	83
00706	3/4"	6	600	104
00707	1"	4	600	165



**Bailer Twine**

UPC Code	2-4500' Rolls Per Carton	Net Wt./Ctn.
01000	240 lb. TENSILE	18 lb.



MADE IN U.S.A.

**Sisal Rope**

	Size		
00710	1/4 X 1500'	Coils	30 lbs.
00711	3/8 X 732'	Coils	30 lbs.
00712	1/2 X 665'	Coils	50 lbs.

**Electric Cutters**

Cuts and fuses all synthetic ropes.  
Features red "on/off" safety light.  
Replacement blades available.

Exclusive manufacturer of Shipmate II and III electric rope cutters.

MADE IN U.S.A.

# POLYPROPYLENE

## Twisted Polypropylene Rope: White or Black

UPC Code	Diameter	Feet/Coil	Ft./Lb.	Net Wt./Coil
21029	3/16"	2400	143	16.8
21030	1/4"	1200	83	14.5
21031	5/16"	600	56	10.8
21032	3/8"	600	36	16.5
21033	1/2"	600	21	28.6
21034	5/8"	600	14	42
21035	3/4"	600	9	64
21036	1"	600	6	108
21037	1-1/4"	600	3	162

- Lightweight
- Strong
- Long Lasting



## Twisted Polypropylene Rope: Tan or Yellow

UPC Code	Diameter	Feet/Coil	Ft./Lb.	Net Wt./Coil
21028	3/16"	2400	143	16.8
21004	1/4"	1200	83	14.5
21008	5/16"	600	56	10.8
21014	3/8"	600	36	16.5
21020	1/2"	600	21	28.6
21023	5/8"	600	14	42
21024	3/4"	600	9	64
21026	1"	600	6	108
21027	1-1/4"	600	3	162

MADE IN U.S.A.



High quality three-strand twisted poly rope is made from the best fibrillated polypropylene. This cordage is lightweight, waterproof and resistant to rot and mildew. It is not affected by oil, grease or gasoline and has superior knot setting characteristics. Available in black, white, safety yellow and tan. Other colors available on special request.

NOTE: 1/4" and larger diameters come in coils; 3/16" and smaller diameters come on tubes.

## Solid Braid Polypropylene


UPC Code

00516	# 16	1/2"
00520	# 20	5/8"



Available in red, blue, green, brown, black, silver, burgundy and stripe combinations. Custom colors and sizes can be run to your specifications. Standard put-up is 500' coils.

- Used for Horse and Dog Leads

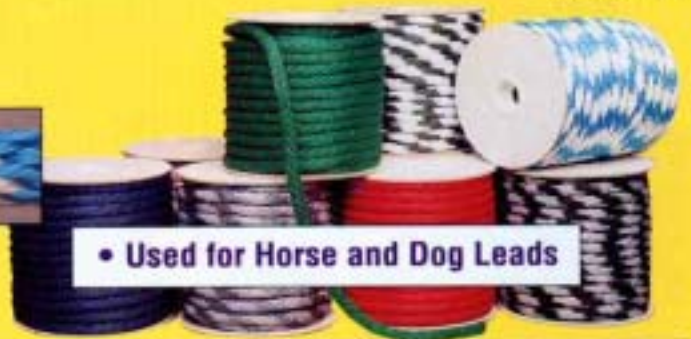

MADE IN U.S.A.

## Hollow Braid Polypropylene

UPC Code

00206	# 6	3/16"	1,000 ft. spool
00208	# 8	1/4"	1,000 ft. spool
00210	# 10	5/16"	500 ft. spool
00212	# 12	3/8"	500 ft. spool

Available in red, blue, green, black, white, yellow and stripe combinations.



MADE IN U.S.A.



**PEARSON INDUSTRIES INC.**

ROPE & TWINE QUALITY PRODUCTS  
811 CO. RD. 4 EAST • P.O. BOX 681360  
PRATTVILLE, AL 36068  
(334) 365-5416 • FAX (334) 365-5729

**P**earson Industries has the capability to produce twisted cordage from all types of natural and synthetic fibers. In addition, we custom manufacture items such as hammock rope and do custom twisting. We manufacture to government specifications.



Since 1940 we've been proud of the products we manufacture and our ability to price them competitively. Most important to us, however, is our reputation...one that has been built on our willingness to stand 100% behind every cordage product we sell.



Call Toll Free 1-800-489-1416 • In Alabama Call Collect (334) 365-5416

All rope footages are subject to a plus or minus 5% variation.

Minimum cordage order is \$150.00. Add 20% to orders under \$150.00. Terms: 1% 10 days, net 30, on approved accounts or C.O.D.

Freight Policy: All shipments are FOB Prattville, Alabama.

Tensile strength specifications are averages based on tests made on new and unused rope. These figures do not allow for conditions such as shock load, wear, knots, sustained load, kinks, etc.

Important: The safe working load for cotton rope is 15% of rated breaking strength; for nylon, 11%; and for polypropylene, 15%.

Rope users must follow recommended working load on specification sheet. Where life and limb is in danger a further reduction of 50% must be used. No guarantee is made if dynamic loading occurs. Rope is not guaranteed if exposed to sharp edges.

Class 1 rope, non life-supporting.